



**FLEXSTORM Inlet Filter Specifications**

WOVEN Geotextile Sediment Bag Specs (2 ft<sup>3</sup> vol)

Material Property	Test Method	Value (ave)
Grab Tensile	ASTM D 4632	255 x 275
Puncture Strength	ASTM D 4833	135 lbs
Trapezoidal Tear	ASTM D 4533	75 lbs
UV Resistance	ASTM D 4355	90%
App Open Size (AOS)	ASTM D 4751	20 sieve
Permittivity	ASTM D 4491	1.5 / sec
Water Flow Rate	ASTM D 4491	200 gpm/sqft
Sediment Removal Efficiency (8% mix)	ASTM D 7351	82%

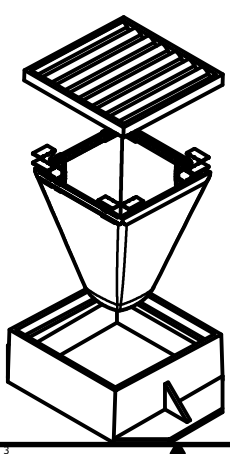

**INSTALLATION:**  
 1. REMOVE GRATE  
 2. DROP FLEXSTORM INLET FILTER ONTO LOAD BEARING LIP OF CASTING OR CONCRETE STRUCTURE  
 3. REPLACE GRATE



DRAWN	ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC	
CHECKED	DISTRIBUTED BY ADS	
QA	WWW.INLETFILTERS.COM	
PEFG	(866) 287-8655 PH	
APPROVED	(630) 355-3477 FX	
	INFO@INLETFILTERS.COM	
SIZE	C	DWG NO
SCALE		FLEXSTORM_SPECS
		REV
		SHEET 1 OF 1



**CITY OF BATAVIA  
 PUBLIC WORKS DEPARTMENT**

**SHEET: 1 OF 1  
 DATE: 1/1/16**

**INLET FILTER**

**STANDARD NO. 4.13**